

09-05-00

A

ASSISTANT COMMISSIONER FOR PATENTS  
 BOX PATENT APPLICATION **JCS85** U.S. PTO  
 Washington, D.C. 20231



DOCKET NO. **Y0R920000611US1**  
 Date: **September 1, 2000**

Sir: **09/01/00** under Rule 1.53(f)  
 Transmitted herewith for filing is the Patent Application/of:  
 Inventors: Thomas Anthony Cofino, Stephen H. Gomory, Juhnyoung Lee,  
 Mark Edward Podlaseck



For: SYSTEM AND METHOD FOR VISUALLY ANALYZING CLICKSTREAM DATA  
 WITH A PARALLEL COORDINATE SYSTEM

Enclosed are:

- 13** Sheets of Informal Drawings.
- An assignment of the invention to International Business Machines Corporation, Armonk, New York 10504.
- A certified copy of a \_\_\_\_\_ application.
- Unsigned Declaration and Power of Attorney is attached to the application.
- Associate Power of Attorney.
- Information Disclosure Statement with form PTO-1449 with references attached.

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE	██████████	██████████
TOTAL CLAIMS	19 - 20 =	0
INDEP CLAIMS	3 - 3 =	0
MULTIPLE DEPENDENT CLAIM PRESENTED		

OTHER THAN A SMALL ENTITY	
RATE	FEES
██████████	\$ 690.00
X \$ 18 =	\$ 0.00
X \$ 78 =	\$ 0.00
+ \$ 260=	\$ 0.00
TOTAL	
	\$ 690.00

If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

- Please charge my Deposit Account No. **09-0468** in the amount of **\$ 690.00**.
- The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. **09-0468**. A duplicate copy of this sheet is enclosed.
- Any additional filing fees required under 37 CFR 1.16.
- Any patent application processing fees under 35 CFR 1.17.

Respectfully submitted,

By

Louis J. Percello  
 Registration No.: 33,206  
 Tel. (914) 945-3145

IBM CORPORATION  
 INTELLECTUAL PROPERTY LAW DEPT.  
 P.O. BOX 218  
 YORKTOWN HEIGHTS, NY 10598

Express Label EL600330860US  
 Date of Deposit: Sept. 1, 2000

**SYSTEM AND METHOD FOR VISUALLY ANALYZING CLICKSTREAM DATA  
WITH A PARALLEL COORDINATE SYSTEM**

5

**FIELD OF THE INVENTION**

10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95

This invention relates to shopping over a computer network. More specifically, the invention relates to the visualization and analysis of clickstream data from one or more online stores where clickstream data is visualized and analyzed by using an extended parallel coordinate system.

**BACKGROUND OF THE INVENTION**

Commerce over networks, particularly e-commerce over the Internet, has increased significantly over the past few years. Part of e-commerce enables users/customers to access information of products and to purchase them from various commercial Web sites (i.e. online stores). There are numerous online stores currently operating in the Internet including: Amazon.com, eToys.com, Buy.com, Wal-Mart.com, LLBean.com, and Macys.com. These online stores provide various

customer services to make commerce activities possible over Web sites. Some of the examples of the basic services are catalogs of merchandise which are both browsable and searchable by various product attributes (e.g., keyword, name, manufacturer, and model number), shopping carts, and checkout process. Some online stores also provide advanced customer services such as wish lists, gift registries, calendars, custom-configuration of products, buyer's groups, chatting, e-mail notification, product evaluations, product recommendations and in-context sales.

As shopping experience in the Internet gets deeper and broader, it becomes an important task for merchants of online stores to understand and analyze the shopping behavior of customers and to improve the shopping experience in their online stores by using this analysis. A basic unit for such analysis is clickstream data from online stores. Clickstream is a generic term to describe visitors' paths through one or more Web sites. A series of Web pages requested by a visitor in a single visit is referred to as a session. Clickstream data in an online store is a collection of sessions on the site. Clickstream data can be derived from raw page requests (referred to as hits) and their associated information (such as timestamp, IP address, URL, status, number of transferred bytes, referrer, user agent, and, sometimes, cookie data) recorded in Web server log files. Analysis of clickstreams shows how a Web site is navigated and used by its visitors.

In an e-commerce environment, clickstreams in online stores provide information essential to understanding the effectiveness of marketing and merchandising efforts, such as how customers find the store, what products they see, and what products they buy. (While not all this information may be available from Web server log files, it can be extracted from associated data sources such as commerce server databases and tied together with HTTP request data.) Analyzing such

information embedded in clickstream data is critical to improve the effectiveness of Web marketing and merchandising in online stores. Interest in interpreting Web usage data in Web server log files has spawned an active market for Web log analysis tools that analyze, summarize, and visualize Web usage patterns.

5

### PROBLEMS WITH THE PRIOR ART

Interest in interpreting Web usage data in Web server log files has spawned an active market for Web log analysis tools that analyze, summarize, and visualize Web usage patterns. While useful to some extent, most of existing tools have the following shortcomings: (1) the summaries they provide obscure useful detail information, (2) the static displays such as histograms and pie charts restrict users to passive interpretation, and (3) the weak (or lack of) connection between purchase data and navigation data limits the ability to understand the site's effectiveness in terms of return on investment.

10  
15  
20

### OBJECTS OF THE INVENTION

20 An object of this invention is an improved system and method for showing steps in a process relative to an independent variable.

An object of this invention is an improved system and method for showing sequential steps in a process, specifically the clickstream data of a web site.

5 An object of this invention is an improved system and method for showing click stream data of a

web site that does not obscure detailed information.

An object of this invention is an improved system and method for showing click stream data on a  
web site that includes both purchase data and navigation data.

10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100

### SUMMARY OF THE INVENTION

The present invention is a computer system and method that provides one or more visualizations to one or more users of a network application. The computer executes a sessionization process that receives one or more Web server logs from one or more online stores, and generates one session table for each session found from requests recorded in Web server logs. In a preferred embodiment, this is a list of requests sorted by session identification and timestamp. A shopping step finder process then receives one or more session tables and generates one micro-conversion table for each given session table. Finally, a visualization process receives one or more of the micro-conversion tables and generates one or more micro-conversion visualizations of one or more micro-conversions. In a preferred embodiment, the micro-conversion visualizations are displayed in parallel coordinates.

**BRIEF DESCRIPTION OF THE FIGURES**

The foregoing and other objects, aspects, and advantages will be better understood from the  
5 following non-limiting detailed description of preferred embodiments of the invention with  
reference to the drawings that include the following:

Figure 1 is a block diagram of one preferred system architecture.

10 Figure 2 is a flow chart of a preferred business process.

Figure 3 is an example of an online store structure.

15 Figure 4 is an example of a Web server log of an online store.

Figure 5 is an example of sessions in an online store used in one preferred embodiment.

Figure 6 is an example of micro-conversions in an online store.

20 Figure 6A is a flow chart of a shopping step finder process.

Figure 7 is an example of a prior art parallel coordinate system.

Figure 8 is an example of micro-conversion visualization with a parallel coordinate system.

Figure 9 is an example of micro-conversion visualization with filters.

5      Figure 10 is an example of a session browsing more than one online stores.

Figure 11 is an example of micro-conversions of a session browsing more than one online stores.

Figure 12 is an example of visualizing sessions visiting more than one online stores.

DOCUMENT NUMBER  
10  
15  
20

#### DETAILED DESCRIPTION OF THE INVENTION

This invention presents an interactive parallel coordinate system that can be used to provide users with greater abilities to interpret and explore clickstream data of online stores on the Web.

Parallel coordinates are a visualization method for displaying multivariate data sets to identify the relationship among the variables. A parallel coordinate system comprises a series of parallel lines that are placed perpendicular to the x-axis (or y-axis) of a Cartesian coordinate system, and preferably each adjacent axis is equidistant, although equidistance is not required. Each parallel axis is assigned a specific dependent variable and dependent variable values are plotted along the respective axis. The independent variable is represented by polygonal lines which connect the corresponding dependent variable values relating to the independent variable and illustrating a relationship between an independent variable and the dependent variables appearing on each axis.

The interactive parallel coordinate system in this invention uses the multiple axes of the system to represent sequential steps which sessions take during their navigation of a Web site, and displays a large number of individual sessions as polygonal lines. The session is a set of events (that may be divided into subsets of events. Each of the axes represents one of the events in the session. An independent variable associated with the event represented on the respective axis is plotted for one or more of the events in the session. For example, the clickstream of a session is represented by a polygonal line that intersects its time stamp value for an event represented by the respective axis for the event.

5

In an alternative embodiment, sessions can be further classified. For example, one or more axes of the parallel coordinate system can be used to classify the sessions by having the classifier as a variable of the axis. For example, if the variable of the "classifier axis" is service provider, all sessions initiated from service provider "A" would start from point "A" on the classifier axis while all sessions initiated from service provider "B" would start from point "B" on the classifier axis. For instance, with one or more variables such as referrers and host names that categorize sessions assigned to axes, the system can visualize the relationship between session categories and navigation paths.

20

In one embodiment, the sessions do not always have events plotted on all of the axes. By arranging the axes in time sequence order, a user can determine at which point in the time sequence order each of the sessions ended. If a particular axis is chosen as a "terminal step", e.g. product purchase, this invention gives the user a clear visual indication of how many of the

sessions ended at the "terminal step", e.g. how many customer sessions ended in a product purchase. Further, by looking at the axis at which a polygonal line ends, it is straightforward to see at what point sessions leave the site.

- 5 In other embodiments, the invention helps users actively explore and interpret data of interest, by providing facilities for filtering, color coding, sub-categorizing, and dynamic querying.

10 Figure 1 (100) is a block diagram of one preferred system architecture showing one or more computers used by shoppers (101), an online store on the Internet (103), a computer network (102) which is used for communication between the user computers (101) and the online store (103), the sessionization process (109) that converts web server log data (400) from the online store (103) into session data (500), the shopping step finder process (111) that converts session data (500) into micro-conversion data (600), and the visualization process (113) that converts micro-conversion data (600) into visualizations of shopping activities (800) by using a parallel coordinate system.

15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95

When a shopper intends to find certain product information and/or purchase one or more products by using the Internet (102), he/she starts a Web browser program (105) in his/her computer (101) and accesses an online store (103) on the Internet which sells the products of interest. Online stores (103) are implemented with a Web server system (104) which receives Web page requests (106) from shoppers and sends out requested Web pages (107) back to shoppers. For this communication between the shopper's computer (101) and the online store (103), the Web browser program (105) and Web server (104) typically use HTTP (HyperText Transfer Protocol),

which is a network protocol defined and implemented for this purpose. A shopper navigates an online store (103), i.e., requests Web pages over the network (102) and browses Web pages which provide information of one or more products sold in the store.

5      The Web server system (104) in the online store (103) records shoppers' navigation of the online store (103) in its Web server log (400). Namely, the Web server system (104) records all the requests (106) it receives from shoppers in the Web server log (400) along with auxiliary data such as timestamp (401), session ID (402), referrer (403), and links shown in the requested Web page (405) for each request (106). The details of these auxiliary data will be described later in  
10     Figure 4 (400). In a preferred embodiment a sessionization process (109) receives a group of requests (106) stored in the Web server log (400) as input and extracts sessions (500) from the requests. In this embodiment, the sessionization process (109) comprises sorting the Web server log (400) by session ID (402) and then by timestamp (401). Other embodiments are envisioned.

15     A session is a series of Web page requests (106) by one shopper in a single visit. The shopping step finder process (111) is described in detail in Figure 6A. In general, the shopping step finder process determines if there is a request that matches one of the axes of the parallel coordinate system and what the value is of the independent variable to be plotted on the respective axis. For example, the finder process takes sessions (500) extracted by the sessionization process (109) as  
20     input and identifies products seen in each shopping step of each session (500) in the input. The output of the shopping step finder process (111) is referred to as micro-conversions (600) and, in this example, shows how many products seen in one shopping step are converted into the next shopping step.

In a non-limiting example, one preferred group of shopping steps includes product impression (604), clickthrough (605), basket placement (606), and purchase (607) and will be described in detail in Figure 6 (600).

5

For a more detailed description of micro-conversion, refer to U.S. patent application number 09/238,861 to J. Lee, L. Morgenstern, M. Podlaseck, E. Schonberg, and D. Wood, entitled "A System and Method for Collecting and Analyzing Information About Content Requested in a Network (World Wide Web) Environment", filed on January 27, 1999 and U.S. patent application number 09/238,348 to J. Lee, L. Morgenstern, M. Podlaseck, E. Schonberg, and D. Wood, entitled "Aggregating and Analyzing Information about Content Requested in an E-Commerce Web Environment to Determine Conversion Rates", file on January 27, 1999.

P  
10  
15  
20

20

Finally, the visualization process (113) takes as input the micro-conversions (600) generated by the previous process (111) and generates as output one or more visualizations of shopping activities (800) in the online store by using a parallel coordinate system. The visualization process (113) plots the independent variable value on the respective axis for each request that has a matching axis in the parallel coordinate system. In a preferred embodiment, the visualization process also generates the polygonal line (using known techniques) to connect the plotted points on each of the respective axes. In alternative embodiments, the visualization process (113) plots lines of different types (e.g. different line thickness, color, type, etc.) to further sub-categorize the plotted features. For example, sessions started by different customer classes can be designated by different color lines. Sessions also can be categorized by other criteria such as the type of the

visited online store, and the type and version of the used browser program and/or operating system.

Figure 2 (200) is a flow chart of a preferred business process. The current invention which provides visualizations of shoppers' activities (800) in an online store (103) can be used by merchants of the online store to understand the effectiveness of their store and/or identify one or more bottlenecks of their store. The merchants can use this information to adjust their Web design and/or merchandising and marketing strategies to improve the performance of their store. The first step (202) of this business process starts with the Web server system (104) of the online store (103) recording all requests (106) from shoppers in its Web server log (400). Then (203), data stored in the Web server log (400) is periodically, say, daily, and/or on demand, retrieved for analysis. Next (204, 205 and 206, respectively), as explained earlier, the Web server log data (400) is processed by the sessionization process (109), the shopping step finder process (111), and the visualization process (113) to generate one or more visualizations of shoppers' activities (800) in the online store (103).

In some preferred embodiments, the generated visualizations (800) typically come with various filters which business analysts can interactively use to select and/or deselect one or more groups of data for their needs. For example, the business analysts can identify where the store loses customers and how many customers are lost, understand the effectiveness of different merchandising tactics, and understand and compare the shopping behavior of different groups of shoppers, e.g., shoppers from different referrers (Web sites which lead the shopper to this online store), shoppers from different ISPs (Internet Service Providers), and/or shoppers who use

different methods to find product information in the store (e.g., hierarchical browsing, keyword search, parametric search, and/or recommendations). The use of filters with the visualizations (800) will be described in detail in Figures 9 (900), 6 (600), and 6A (650).

- 5 Next (207), by examining the generated visualizations of shoppers' activities (800) in the online store (103), business analysts understand the effectiveness of their store and/or identify one or more problems with their store such as a broken link to promoted products, or a lengthy and cumbersome checkout process. Business analysts make recommendations for store improvement based their findings.

10 By using the analysis results from the business analysts, marketers, merchandisers, and Web designers of the online store (103) develop and/or update their strategies for Web design, marketing and merchandising (208), and generate appropriate recommendations for the new/updated strategies. Finally (209), the recommendations from the Web designers, marketers and merchandisers are passed on to the Web programmers and administrators of the online store (103), who implement the recommended changes to the Web appearance and/or navigation paths of the online store (103) and other Web presentation of the store's marketing and merchandising efforts such as advertisement banners and other links in portal sites such as Yahoo!, AltaVista, Lycos, and Excite@Home.

15  
20

See U.S. Patent Application number xxx entitled **BUSINESS METHOD FOR VISUALLY ANALYZING CLICKSTREAM DATA WITH A PARALLEL COORDINATE SYSTEM,**

**filed on the same day as this application, to Juhnyoung Lee et al., which is herein incorporated by reference in its entirety.**

Figure 3 (300) is an example of a prior art online store structure showing all the Web pages  
shoppers of the store (103) can request. They include Home page (301), Product category A  
(302), Product category B (303), Product P1 (304) which is promoted from the Home page  
(301), Search (305) and Search Result page (311), Product A1 (306) and A2 (307) which belong  
to product category A (302), Product B1 (308), B2 (309) and B3 (310) which belong to product  
category B (303), Shopping basket page (312), Purchase page (313), and Thank you page (315).

An arrowhead line between two boxes in the figure mean that there a link from the source page to  
the destination page so that a shopper can directly access the destination page from the source  
page. That is, a Web page contains hyperlinks in it to all the destination pages which are  
accessible from this page. For example, Product P1 page (304) is directly accessible from Home  
page (301), but not from Product A1 page (306). Also, Home page (303) contains hyperlinks to  
four different Web pages, Product category A (302), Product category B (303), Product P1  
(304), and Search page (305). Product P1 page (304) contains only one hyperlink to Basket page  
(312). Note that Search Result page (311) is a dynamic page whose content changes based on the  
keyword(s ) used in the Search page (305). The Search Result page (311) can contain zero or  
more hyperlinks to product pages in addition to a hyperlink to Basket page (312).

Figure 4 (400) is an example of a Web server log of an online store showing a number of requests  
(106) to an online store (103) whose structure was shown in Figure 3 (300). Each request  
comprises several attributes including timestamp (401), session ID (402), referrer (403),

requested page (404), and links (405). Timestamp (401) is the system-generated time when the request was made to the Web server system (104). In this log data (400), requests are sorted by timestamp in an ascending order. Session ID (402) is a unique identification number for different sessions. As explained earlier, a session is a series of Web page requested by a shopper in a single visit. In this log data (400), there are three sessions whose ids are S1, S2 and S3. Requests from these three sessions are interleaved in the log by their timestamp. A referrer (403) is the Web page the shopper was on when he/she makes this request. For example, the referrer of the first request of session S1 (made at T1) is R1, an external Web page, while the referrer of the second request of S1 (made at T3) is Home page which was the current page (404) of the previous request. Links (405) are hyperlinks contained in the current page (404). For example, at T1, the links (405) of the current page (404) , i.e., Home page (301) are Product category A (302), Product category B (303), Product P1 (304), and Search page (305). At T9, the links (405) of the current page (404), i.e., Search Result page (311) are hyperlinks to three product pages, i.e., A2 (307), B1 (308), and B2 (309) which are dynamically generated by the search function of the online store. The use of these links (405) in the server log (400) is novel.

Figure 5 (500) is an example of sessions in an online store showing three sessions extracted from Web server log (400). The sessionization process (109) extracts sessions from requests (106) in Web server log (400) by using timestamp (401) and session ID (402). In this example, the process (109) extracts three sessions S1 (501), S2 (502) and S3 (503). The structure of each session is the same as that of Web server log (400) having timestamp (501), session ID (505), Referrer (506), current page (507) and links (508). The requests in each session is the same as those in Web

100-00600-1234567890

server log (400) except they are now separated in different session tables, one table for each session.

Figure 6 (600) is an example of micro-conversions in an online store showing conversions of  
5 different sessions (i.e., shoppers) (500) among different shopping steps. The shopping step finder process (111) identifies products seen in each shopping step in consideration. One preferred group of shopping steps in online stores comprises the following four steps: product impression (the view of hyperlinks to a Web page presenting a product) (604), clickthrough (the click on the hyperlink and view the Web page of the product) (605), basket placement (the placement of the item in the shopping basket) (606), and purchase (the purchase of the item, i.e., completion of the transaction) (607). Micro-conversion means a shopper moving to a next shopping step for a product. In this example, the shopping step finder (111) generates one micro-conversion table for each of sessions S1 (601), S2 (602), and S3 (603). For example, S1 (601) has product impressions at five times, T1, T3, T10, T12, and T14. At T1, S1 sees an impression of P1. At T3, S1 sees impressions of A1 and A2. At T10, S1 sees an impression of P1. At T12, S1 sees impressions of B1, B2, and B3. At T14, again S1 sees impressions of B1, B2, and B3. Among these product impressions, only three are converted to clickthroughs, i.e., A1 at T3, B2 at T12, and B3 at T14. Then, two clickthroughs out of these three are converted to basket placements, A1 and B3. Finally, both basket placements, i.e., A1 and B3, are converted into purchases. The  
20 shopping step finder process (111) identifies micro-conversions of sessions S2 and S3 in a similar way, and generates the micro-conversion tables (600(b) and 600(c)).

Figure 6A (650) is a flow chart of a shopping step finder process (111). The process starts with two types of input: a set of requests in a session denoted as  $\{R\}$ , and a set of (shopping) steps, denoted as  $\{S\}$ , that the process will identify in the requests belongs to  $\{R\}$ . The elements of  $\{S\}$ , i.e., (shopping) steps, provide criteria for deciding if a request belongs to each of the steps. For example, a request in a session belongs to the step of product impressions (604) if the Web page of the request (507) contains one or more hyperlinks (508) to a product page. Also, a request belongs to the step of clickthroughs (605) if the current page of the request (507) is a product page. A request belongs to the step of basket placement (606) if the current page of the request (507) is a basket page. Finally, a request belongs to the step of purchase (607) if the current page of the request (507) is a purchase page.

The shopping step finder process (111 and 650) checks which request belongs to what step by using the decision criteria of each step (655). When the process finds a request belonging to a step, it tags the request as an element of the step (656). After going through this checking for every element in  $\{R\}$ , i.e., every request in the given session, for every step in  $\{S\}$ , the process outputs another set  $\{C\}$  whose elements  $C_i$  represent micro-conversions comprising one or more requests tagged as a particular step,  $S_i$ , of  $\{S\}$  (659). The shopping step finder process (111 and 650) is executed for every session (500) to identify shopping steps of the sessions that will be visualized by a parallel coordinate system (113).

Figure 7 (700) is an example of a prior art parallel coordinate system which was developed for displaying multivariate data sets to identify the relationship among the variables in the set. A parallel coordinate system (700) comprises a series of parallel lines (701, 702, 703, and 704) that

5

are placed equidistantly. Each parallel axis is assigned a specific dependent variable (e.g., X (701), Y (702), Z (703) and W (704)) and dependent variable values (705) are plotted along the respective axis. The independent variable is represented by polygonal lines (706) which connect the corresponding dependent variable values (also referred to as data points) (705) and which illustrate a relationship between an independent variable and the dependent variables appearing on each axis.

10

Figure 8 (800) is an example of micro-conversion visualization with a parallel coordinate system. In this figure, each polygonal line represents a single session (501, 502 or 503) and its progression in an online store (103). The first parallel axis (801) represents a session categorizer, in this example, the initial referrer (506) of each session. There are two referrers in the figure, i.e., A (806) and B (807). The next four parallel axes represent shopping steps in an online store (103), i.e., product impression (802), clickthrough (803), basket placement (804), and purchase (805). For data points in the shopping step axes, timestamps of sessions are used. An advantage of using timestamps for data points is that because they are unique to individual sessions, no two sessions share the same data points in these axes. Using data points unique to individual sessions prevents the problem of overlaying lines between two parallel axes, which is serious in parallel coordinate visualizations, because it sometimes obscures the accuracy of visualizations. One disadvantage of using timestamps for data points is that they do not carry any sense of volume. Namely, the 20 existence of a data point in a shopping step axis does not tell how many products were viewed, placed in basket, or purchased. Rather, it merely says that one or more products were viewed, placed or purchased.

15

20

In this figure, it is important to notice that some polygonal lines (808, 809, 810, 812, and 813) stop before they reach the last shopping step, i.e., purchase (805). The parallel coordinate system in this invention does not give a session a data point value for the next shopping step and beyond if the session does not convert to the next step. Hence, each polygonal line stops at the last step  
5 the session reached, which indicates the point the session leaves the store. This figure (800) shows that the number of lines connecting two adjacent parallel axes decreases, as polygonal lines go from left to right up to the purchase line (805). Dropouts of polygonal lines visualize where the store loses its customers.

10 Another note about this figure is that each polygonal line representing a session can be associated with one or more hyperlinks. Clicking on these hyperlinks brings up one or more Web pages providing more information about the associated session such as information about the session owner and products pursued in the session. This feature is referred to as hyperlink association.

15 Figure 9 (900) is an example of micro-conversion visualization with filters. The parallel coordinate system in this invention can have zero or more filters which help users interactively select and/or de-select one or more groups of sessions and customers in the visualizations. A filter can be also related with the first parallel axis (901) which is a session categorizer. In this figure, there are two filters, i.e., referrer (910) and product category (920). The referrer filter (910) has  
20 three values, referrers A, B and C. In this example, referrers A and B are selected, but C is not. This referrer filter is also represented with the first parallel axis and two values, A (906) and B (907), are displayed. All the sessions visualized in this parallel coordinate system come from either A or B Web site. Real-world examples of referrers of interest may include portal sites such as

Yahoo!, AltaVista, Lycos, and Excite@Home. The product category filter has four values, and two values among them, Men's and Women's are selected. Namely, all the sessions visualized in this figure see products from either the Men's or Women's category. In order to distinguish sessions which see Men's products from those which see Women's products, the parallel coordinate system may use different colors to display polygonal lines. For example, it uses blue to display polygonal lines of sessions which see Men's products, while it uses red for sessions which see Women's products.

Figure 10 (1000) is an example of a session browsing more than one online store. When a shopper tries to find one or more products of interest either on the Internet or in the physical world, he/she often visits more than one store to browse and compare products sold in different stores. By aggregating Web server logs (400) from one or more online stores (103) with shoppers' session IDs commonly shared across multiple online stores, an extended sessionization process (109) can construct sessions browsing multiple online stores. In this figure (1000), a session denoted as S3 (1002), visits three stores, first, ST1, then, ST2, and finally, ST3 (1003). With the exception of the store column (1003), the session table (1000) contains the same attributes for sessions, i.e., timestamp (1001), session ID (1002), referrer (1004), current page (1005) and links (1006).

Figure 11 (1100) is an example of micro-conversions of a session browsing more than one online store. From the extended session table shown in Figure 10 (1000), an extended shopping step finder process (111) can generate a micro-conversion table for a session visiting multiple online stores. This figure (1100) shows the product impressions (1101), clickthroughs (1102), basket placement (1103), and purchases (1104) of the session, S3, shown in Figure 10 (1000). Unlike the

micro-conversion table for one online store (600), this table has store name, such as ST1, ST2, or ST3, in each data entry as well as timestamp and product name.

Figure 12 (1200) is an example of visualizing sessions visiting more than one online store. This figure visualizes the progression of two sessions, Session X (1210) and Session Y (1211), in four stores, Store 1 (1206), Store 2 (1207), Store 3 (1208), and Store 4 (1209). The first parallel axis (1201) in this parallel coordinate system uses store as the session categorizer. The next four axes (1202, 1203, 1204 and 1205) are the four shopping steps, i.e., product impressions, clickthroughs, basket placement and purchase, as before. Note that the data points in the shopping step axes are timestamps of the corresponding activities. The visualization illustrates that Session X (1210) first visited Store 1 (1206) but left the store at the clickthrough step (1212). Then it (1210) visited Store 2 (1207) and again left the store at the clickthrough step (1213). Then Session X (1210) visited Store 3 (1208) and purchased from the store (1215). On the other hand, Session Y (1211) first visited Store 2 and left the store at the basket placement step (1214). Then it (1211) visited Store 4 (1209) but left the store at the clickthrough step (1216). Finally, Session Y (1211) visited Store 1 (1206) and purchased from the store (1217).

## CLAIMS

We claim:

- 5        1. A computer system for providing one or more visualizations to one or more users, the system comprising

one or more central processing units (CPUs), one or more memories, and one or more network interfaces to one or more networks;

10      a sessionization process that receives one or more Web server logs from one or more online stores, and generates one session table for each session found from requests recorded in Web server logs;

15      a shopping step finder process that receives one or more session tables, and generates one micro-conversion table for each given session table; and

a visualization process that receives one or more micro-conversion tables, and generates one or more micro-conversion visualizations of one or more micro-conversions.

20

2. A system, as in claim 1, where the Web server log includes one or more Web page request records.

3. A system, as in claim 2, where the Web page request record comprises a timestamp that is the system-generated time when the request is made, a user ID that is a unique number identifying the user who made the request, a session ID that is a unique number identifying the session which made the request, a referrer that is the Web page the session sees immediately before making this request, a current page that is the Web page requested, and a group of hyperlinks that is contained in the current page.
- 5
4. A system, as in claim 1, where the session table includes one or more Web page request records with all the session ID values in a session table being the same.
- 10
5. A system, as in claim 1, where the micro-conversion table comprises shopping steps in an online store and product entries for each shopping step.
- 15
6. A system, as in claim 5, where the shopping steps include a product impression that is the view of hyperlink to a Web page presenting a product and/or a service, a clickthrough that is the click on the hyperlink and view of the Web page of the product and/or service, a basket placement that is the placement of the item in the shopping basket, and a purchase that is the purchase of the item and the completion of the transaction.
- 20
7. A system, as in claim 5, where the product or service entry comprises a product or service ID that is a unique number identifying the product or service, and a timestamp when the corresponding shopping activity happens.

8. A system, as in claim 1, where the micro-conversion visualization comprises a traditional parallel coordinate system and one or more extension components.

9. A system, as in claim 8, where the traditional parallel coordinate system is a parallel coordinate system comprising a series of parallel lines that are placed equidistantly, each parallel line being assigned a specific dependent variable and dependent variable values being plotted along the respective axis, and an independent variable that is represented by polygonal lines connecting the corresponding dependent variable values (also referred to as data points) and illustrating a relationship between an independent variable and the dependent variables appearing on each axis.

10  
11  
12  
13  
14  
15

10. A system, as in claim 8, where the extension components include one or more parallel axes of sequential events, one or more dependent variable values of timestamps, one or more dropouts of polygonal lines, one or more filters, one or more categorizers, and one or more hyperlink association.

11. A system, as in claim 10, where the parallel axes of sequential events is an assignment of a series of sequential events to parallel lines in a parallel coordinate system.

20 12. A system, as in claim 11, where the sequential events include one or more steps of shopping in one or more stores, and one or more product or service development steps.

13. A system, as in claims 10, where the dependent variable values of timestamps is an assignment of timestamp values as data points to a series of sequential events that are assigned to the equal number of parallel axes in a parallel coordinate system.

5       13. A system, as in claims 10, where the dropout of a polygonal line is disappearance of a polygonal line before the line reaches the last parallel axis in a parallel coordinate system with the parallel axes of sequential events.

14. A system, as in claim 10, where the filter is a means to select and/or de-select one or more groups of polygonal lines viewed in a parallel coordinate system.

15       15. A system, as in claim 10, where the categorizer is a parallel axis in a parallel coordinate system whose purpose is to categorize polygonal lines in the system.

16. A system, as in claim 15, where the categorizer includes one or more of the following: the referrer Web sites of sessions, the ISPs (Internet Service Providers) of sessions, the lengths of sessions, the methods used to find product or service information by sessions, the geographic regions where sessions come from, the ages, sex, education levels, and income levels of the owners of sessions, the sales history of the owners of sessions, the Web page patterns accessed by sessions or by the owners of sessions, either or not ordered by session, or by time.  
20

17. A system, as in claim 10, where the hyperlink association is the association of one or more hyperlinks with the polygonal line representing a session, clicking on the polygonal line opens a Web page delivering detail information of the session.

5 18. A method for visually analyzing clickstream data comprising the steps of

receiving one or more Web server logs from one or more online stores' Web server systems;

generating one or more session tables from the given Web server log(s);

generating one or more micro-conversion tables from the generated session table(s);

generating one or more micro-conversion visualizations from the generated micro-conversion tables; and

interactively generating one or more variations of the generated micro-conversion visualizations upon interactive requests from one or more users.

19. A computer system for visually analyzing clickstream data comprising:

20

means for receiving one or more Web server logs from one or more online stores' Web server systems;

means for generating one or more session tables from the given Web server log(s);

means for generating one or more micro-conversion tables from the generated session table(s);

- 5 means for generating one or more micro-conversion visualizations from the generated micro-conversion tables; and

means for interactively generating one or more variations of the generated micro-conversion visualizations upon interactive requests from one or more users.

**SYSTEM AND METHOD FOR VISUALLY ANALYZING CLICKSTREAM DATA  
WITH A PARALLEL COORDINATE SYSTEM**

5

**ABSTRACT**

A computer system and method that provides one or more visualizations to one or more users of a network application. The computer executes a sessionization process that receives one or more Web server logs from one or more online stores, and generates one session table for each session found from requests recorded in Web server logs. A shopping step finder process then receives one or more session tables and generates one micro-conversion table for each given session table. Finally, a visualization process receives one or more of the micro-conversion tables and generates one or more micro-conversion visualizations of one or more micro-conversions.



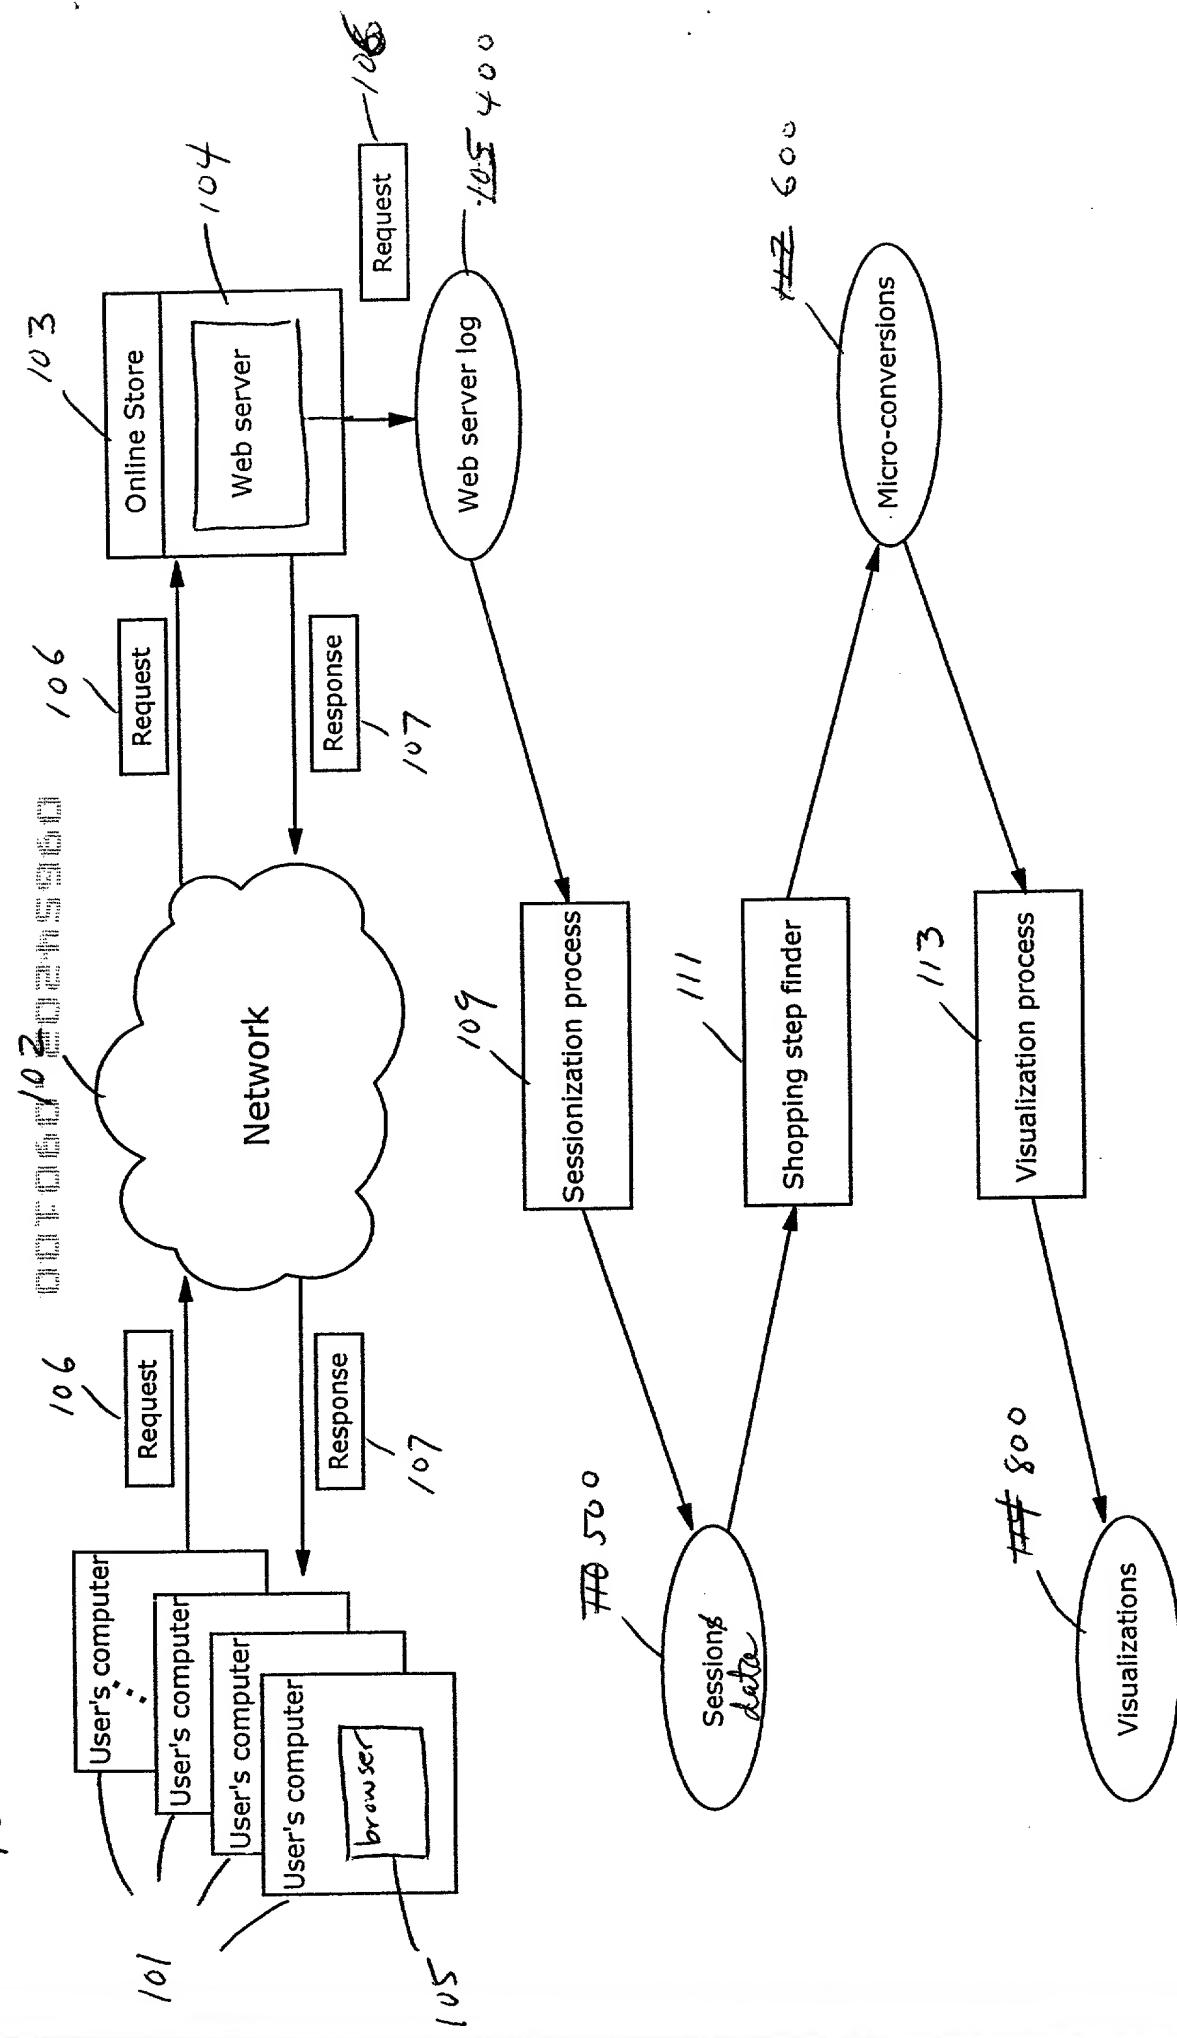


Figure 1: A block diagram of one preferred system architecture

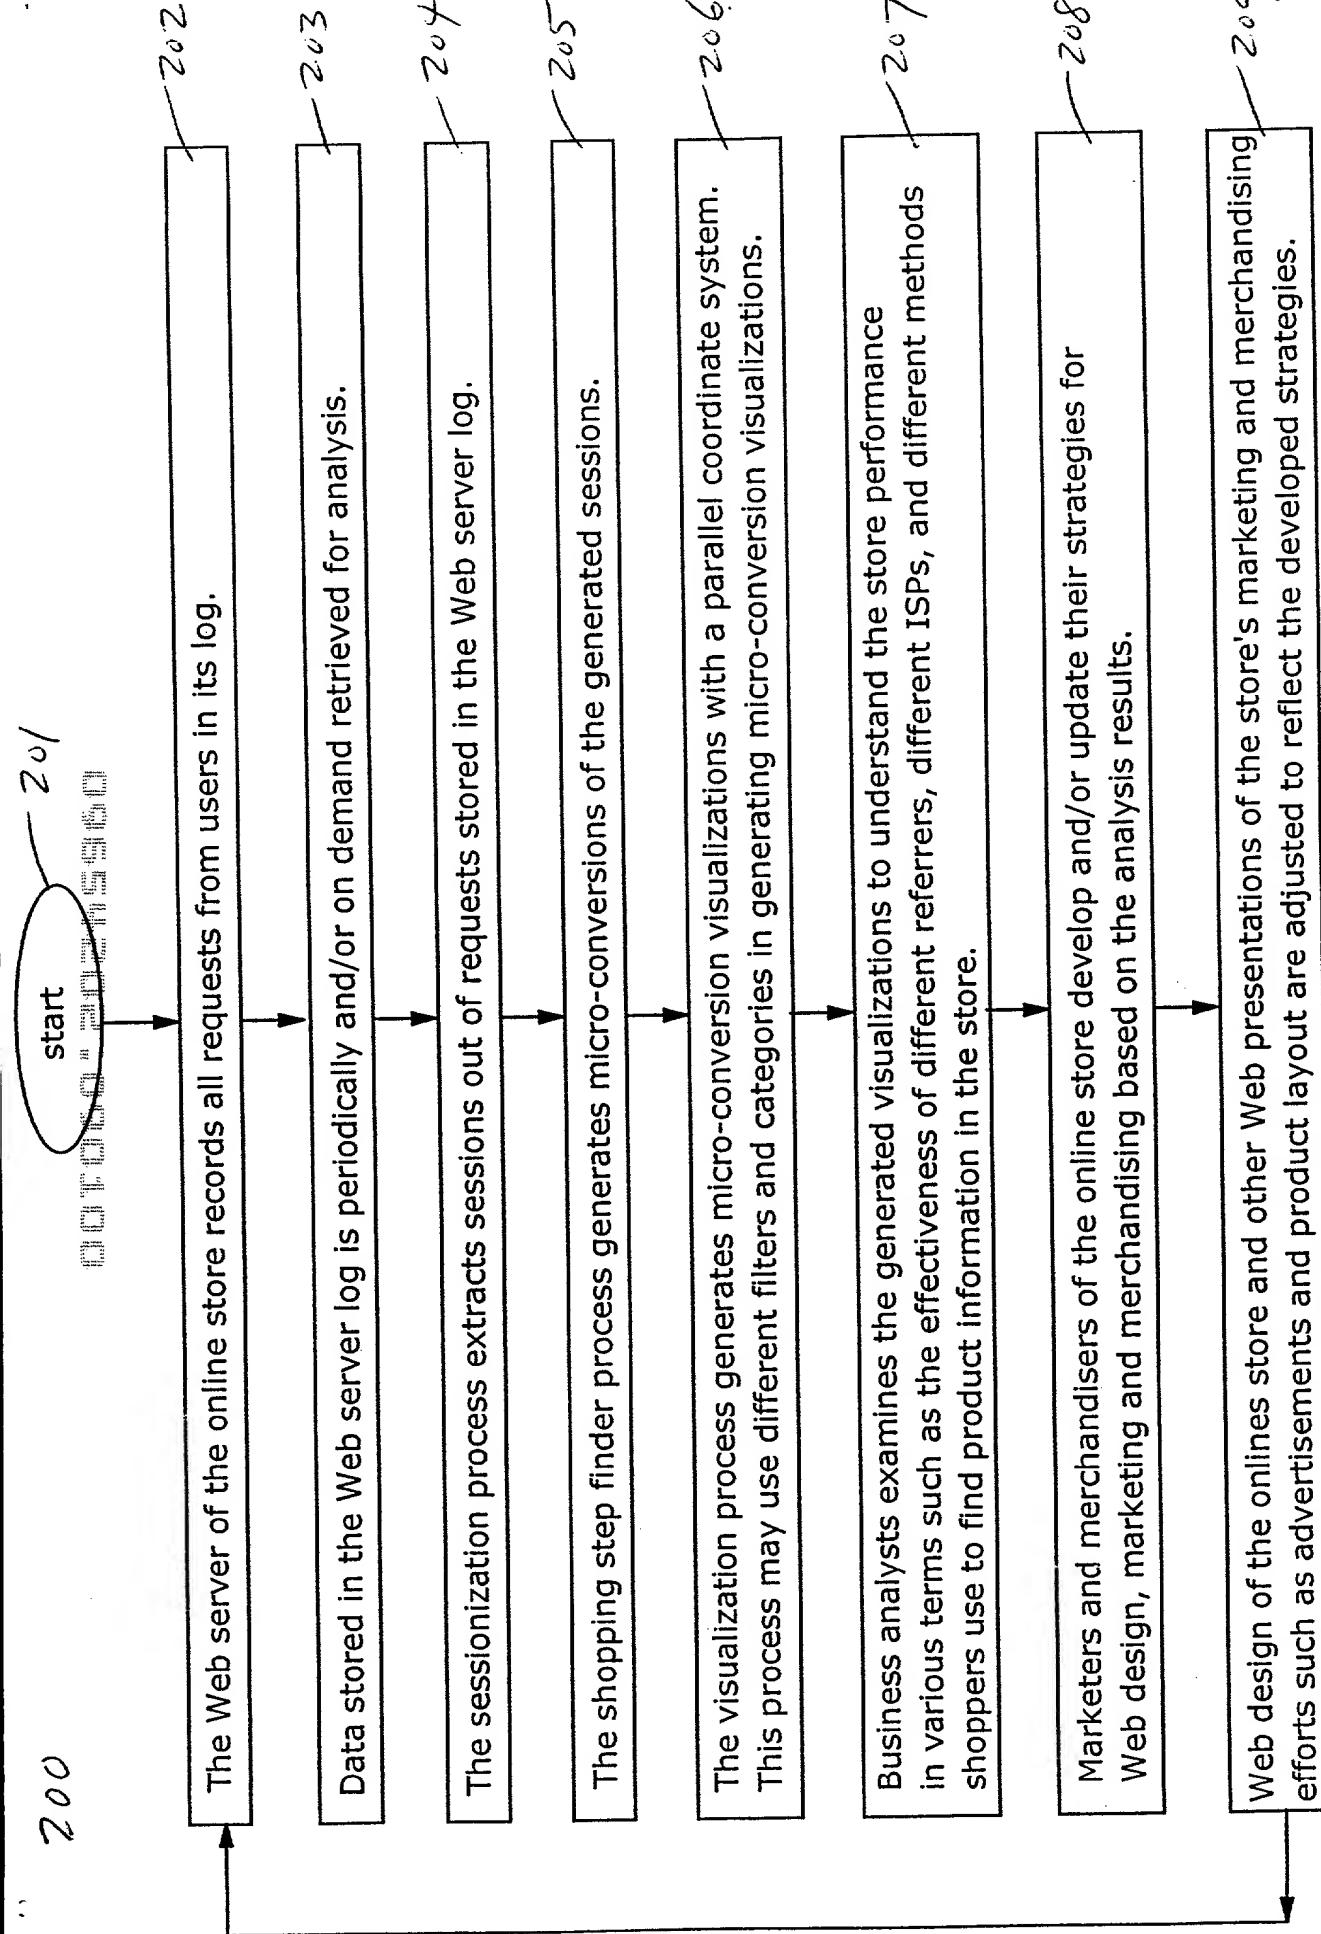

**Figure 2: A flow chart of a preferred business process**

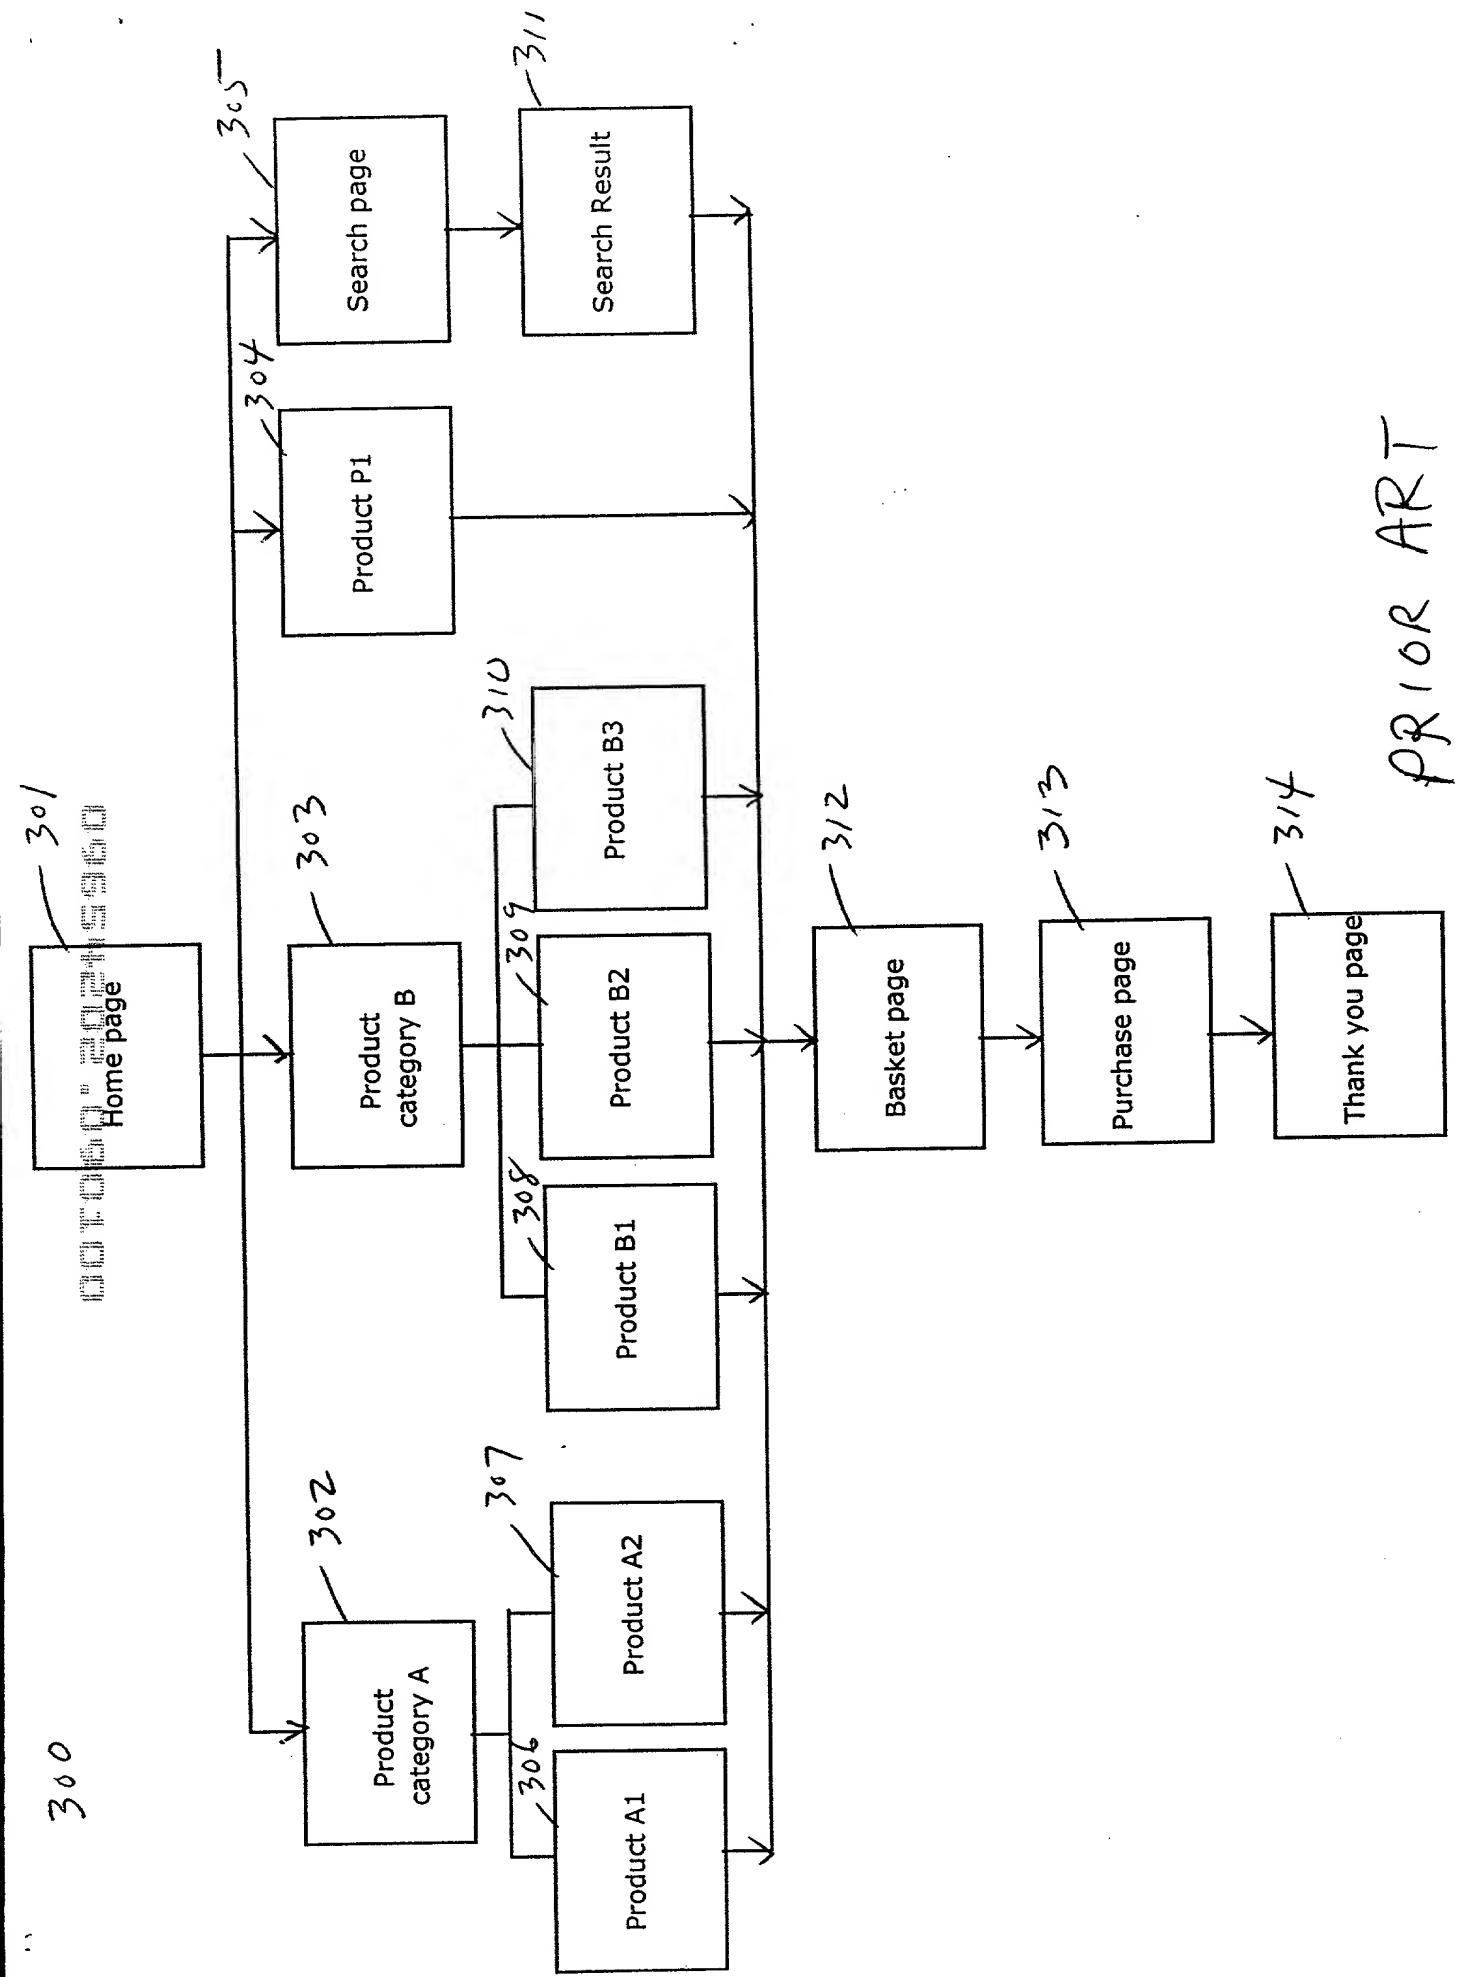

**Figure 3: An example of an online store structure**

**Figure 4: An example of a Web server log of an online store**

Timestamp	Session ID	Referrer	Current Page	Links
T1	S1	R1	Home	A, B, P1, Search
T2	S2	R2	Home	A, B, P1, Search
T3	S1	Home	A	A1, A2
T4	S3	R3	Home	A, B, P1, Search
T5	S2	Home	Search	
T6	S1	A	A1	Basket, A
T7	S3	Home	P1	Basket
T8	S1	A1	Basket	Purchase, Home
T9	S2	Search	Search Result	A2, B1, B2
T10	S1	Basket	Home	A, B, P1, Search
T11	S2	Search Result	B1	Basket, B
T12	S1	Home	B	B1, B2, B3
T13	S1	B	B2	Basket, B
T14	S1	B2	B	B1, B2, B3
T15	S2	B1	Basket	Purchase, Home
T16	S1	B	B3	Basket, B
T17	S2	Basket	Purchase	Thank You
T18	S3	P1	Home	A, B, P1, Search
T19	S1	B3	Basket	Purchase, Home
T20	S1	Basket	Purchase	Thank You
T21	S1	Purchase	Thank You	Home
T22	S3	Home	A	A1, A2
T23	S2	Purchase	Thank You	Home

Timestamp	Session ID	Referrer	Current Page	Links
T1	S1	R1, P1, Search	Home	A, B, P1, Search
T3	S1	Home	A	A1, A2
T6	S1	A	A1	Basket, A
T8	S1	A1	Basket	Purchase, Home
T10	S1	Basket	Home	A, B, P1, Search
T12	S1	Home	B	B1, B2, B3
T13	S1	B	B2	Basket, B
T14	S1	B2	B	B1, B2, B3
T16	S1	B	B3	Basket, B
T19	S1	B3	Basket	Purchase, Home
T20	S1	Basket	Purchase	Thank You
T21	S1	Purchase	Thank You	Home

(a) Session S1 — 501

Timestamp	Session ID	Referrer	Current Page	Links
T2	S2	R2	Home	A, B, P1, Search
T5	S2	Home	Search	A2, B1, B2
T9	S2	Search	Search Result	Basket, B
T11	S2	Search Result	B1	Purchase, Home
T15	S2	B1	Basket	Thank You
T17	S2	Basket	Purchase	Home
T23	S2	Purchase	Thank You	A1, A2

(b) Session S2 — 502

Timestamp	Session ID	Referrer	Current Page	Links
T4	S3	R3	Home	A, B, P1, Search
T7	S3	Home	P1	Basket
T18	S3	P1	Home	A, B, P1, Search
T22	S3	Home	A	A1, A2

(c) Session S3 — 503

Figure 5: An example of sessions in an online store

604                    605                    606                    607

<b>Product impressions</b>	<b>Clickthroughs</b>	<b>Basket placement</b>	<b>Purchase</b>
T1, P1	T6, A1	T8, A1	T20, A1
T3, A1	T13, B2	T19, B3	T20, B3
T3, A2	T16, B3		
T10, P1			
T12, B1			
T12, B2			
T12, B3			
T14, B1			
T14, B2			
T14, B3			

(a) Micro-conversions of session S1 — 601


<b>Product impressions</b>	<b>Clickthroughs</b>	<b>Basket placement</b>	<b>Purchase</b>
T2, P1	T11, B1	T15, B1	T17, B1
T9, A2			
T9, B1			
T9, B2			

(b) Micro-conversions of session S2 — 602

<b>Product impressions</b>	<b>Clickthroughs</b>	<b>Basket placement</b>	<b>Purchase</b>
T4, P1	T7, P1		
T18, P1			
T22, A1			
T22, A2			

(c) Micro-conversions of session S3 — 603

Figure 6: An example of micro-conversions in an online store

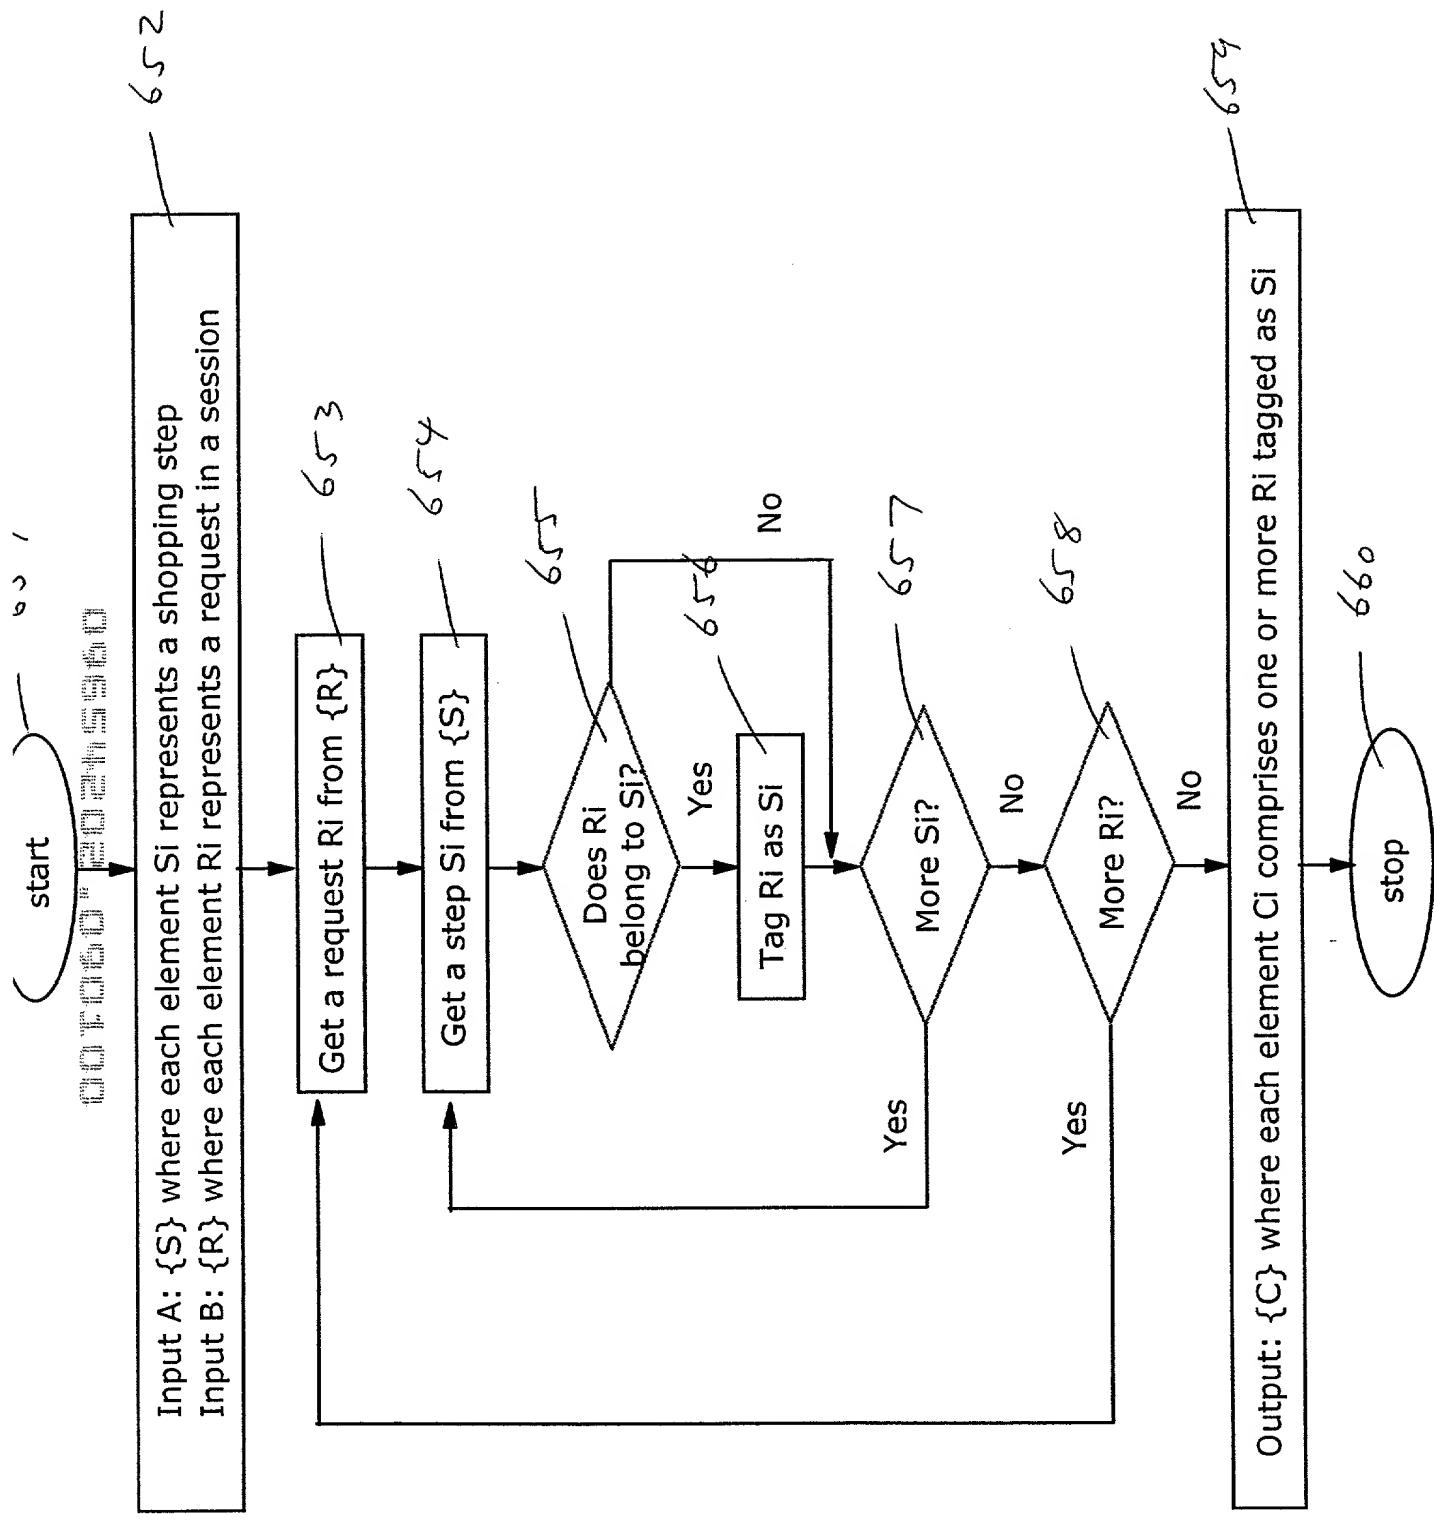

**Figure 6A: A flow chart of a shopping step finder process**

700

00 T 0060 " 20 215 300 0

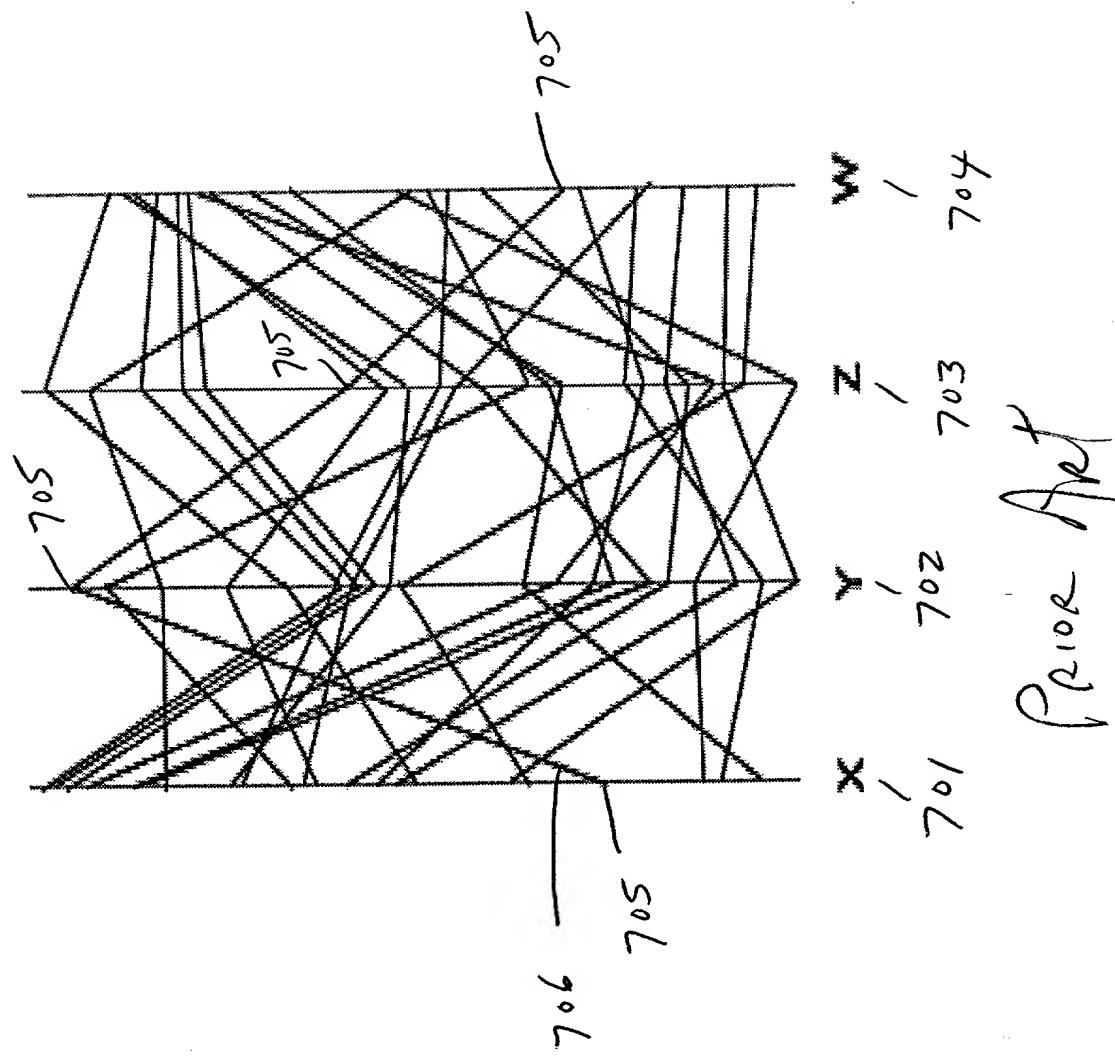


Figure 7: An example of a traditional parallel coordinate system

800

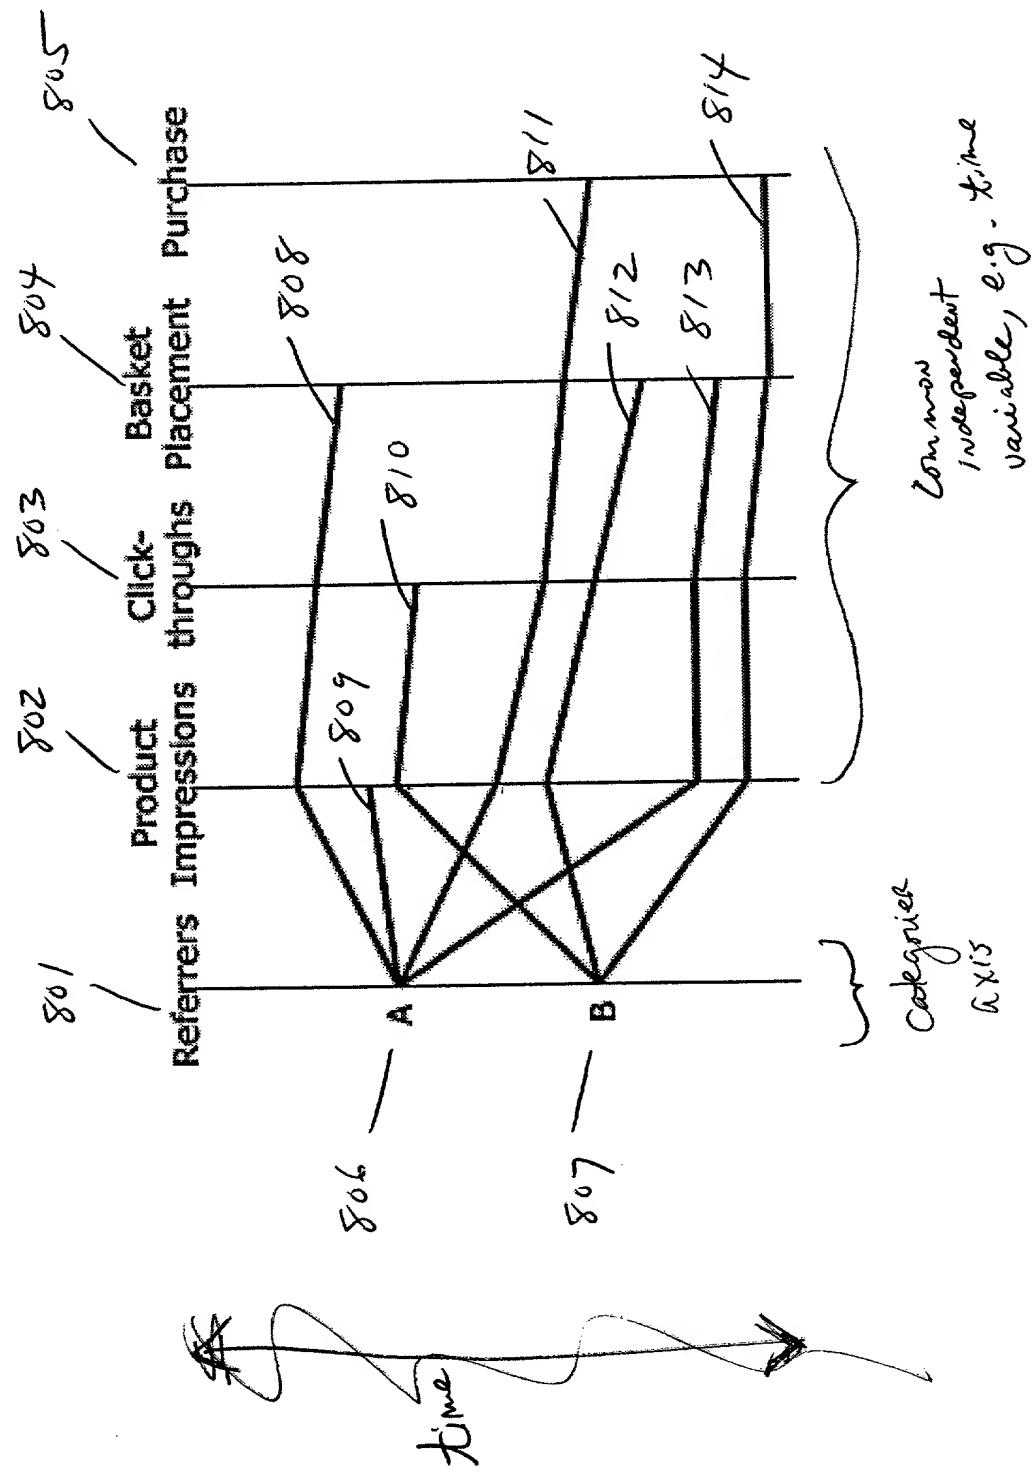


Figure 8: An example of a micro-conversion visualization with a parallel coordinate system

900

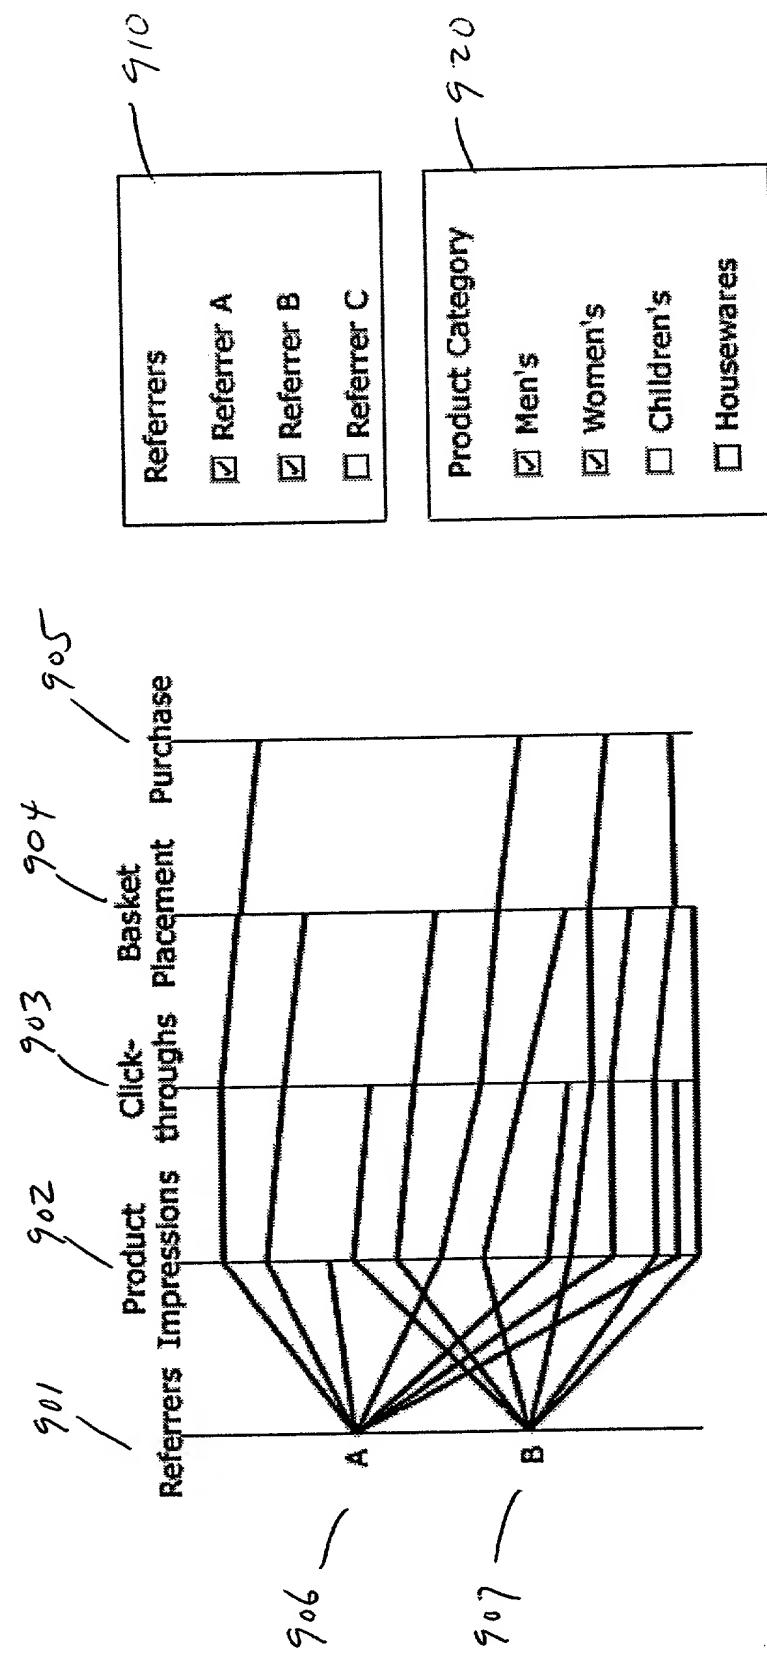


Figure 9: An example of a micro-conversion visualization with filters

1000

000 T0000 "2000000000000000

1001 / 1002 / 1003 / 1004 / 1005 / 1006

Timestamp	Session ID	Store	Referrer	Current Page	Links
T4	S3	ST1	R3	Home	A, B, P1, Search
T7	S3	ST1	Home	P1	Basket
T18	S3	ST1	P1	Home	A, B, P1, Search
T22	S3	ST1	Home	A	A1, A2
T23	S3	ST2	ST1	Home	B, C, D, Search
T24	S3	ST2	Home	Search	
T25	S3	ST2	Search	Search Results	C2, C3, D1
T26	S3	ST2	Search Results	C2	Basket, C
T27	S3	ST2	C2	Search Results	C2, C3, D1
T28	S3	ST2	Search Results	C3	Basket, C
T29	S3	ST3	ST2	Home	A, B, C, D, Search
T30	S3	ST3	Home	Search	
T31	S3	ST3	Search	Search Results	A1, B1, C3, D2
T32	S3	ST3	Search Results	D2	Basket, D
T33	S3	ST3	D2	Basket	Purchase, Home
T34	S3	ST3	Basket	Home	A, B, C, D, Search
T35	S3	ST3	Home	D	D1, D2, D3
T36	S3	ST3	D	D3	Basket, D
T37	S3	ST3	D3	Basket	Purchase, Home
T38	S3	ST3	Basket	Purchase	Thank You
T39	S3	ST3	Purchase	Thank You	Home

Figure 10: An example of a session browsing more than one online stores

1100

00100000000000000000000000000000

1101

1102

1103

1104

1105

1106

1107

1108

1109

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1120

1121

1122

1123

1124

1125

1126

1127

1128

1129

1130

1131

1132

1133

1134

1135

1136

1137

1138

1139

1140

1141

1142

1143

1144

1145

1146

1147

1148

1149

1150

1151

1152

1153

1154

1155

1156

1157

1158

1159

1160

1161

1162

1163

1164

1165

1166

1167

1168

1169

1170

1171

1172

1173

1174

1175

1176

1177

1178

1179

1180

1181

1182

1183

1184

1185

1186

1187

1188

1189

1190

1191

1192

1193

1194

1195

1196

1197

1198

1199

1100

1101

1102

1103

1104

1105

1106

1107

1108

1109

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1110


1111

1112

1113

1114

1115

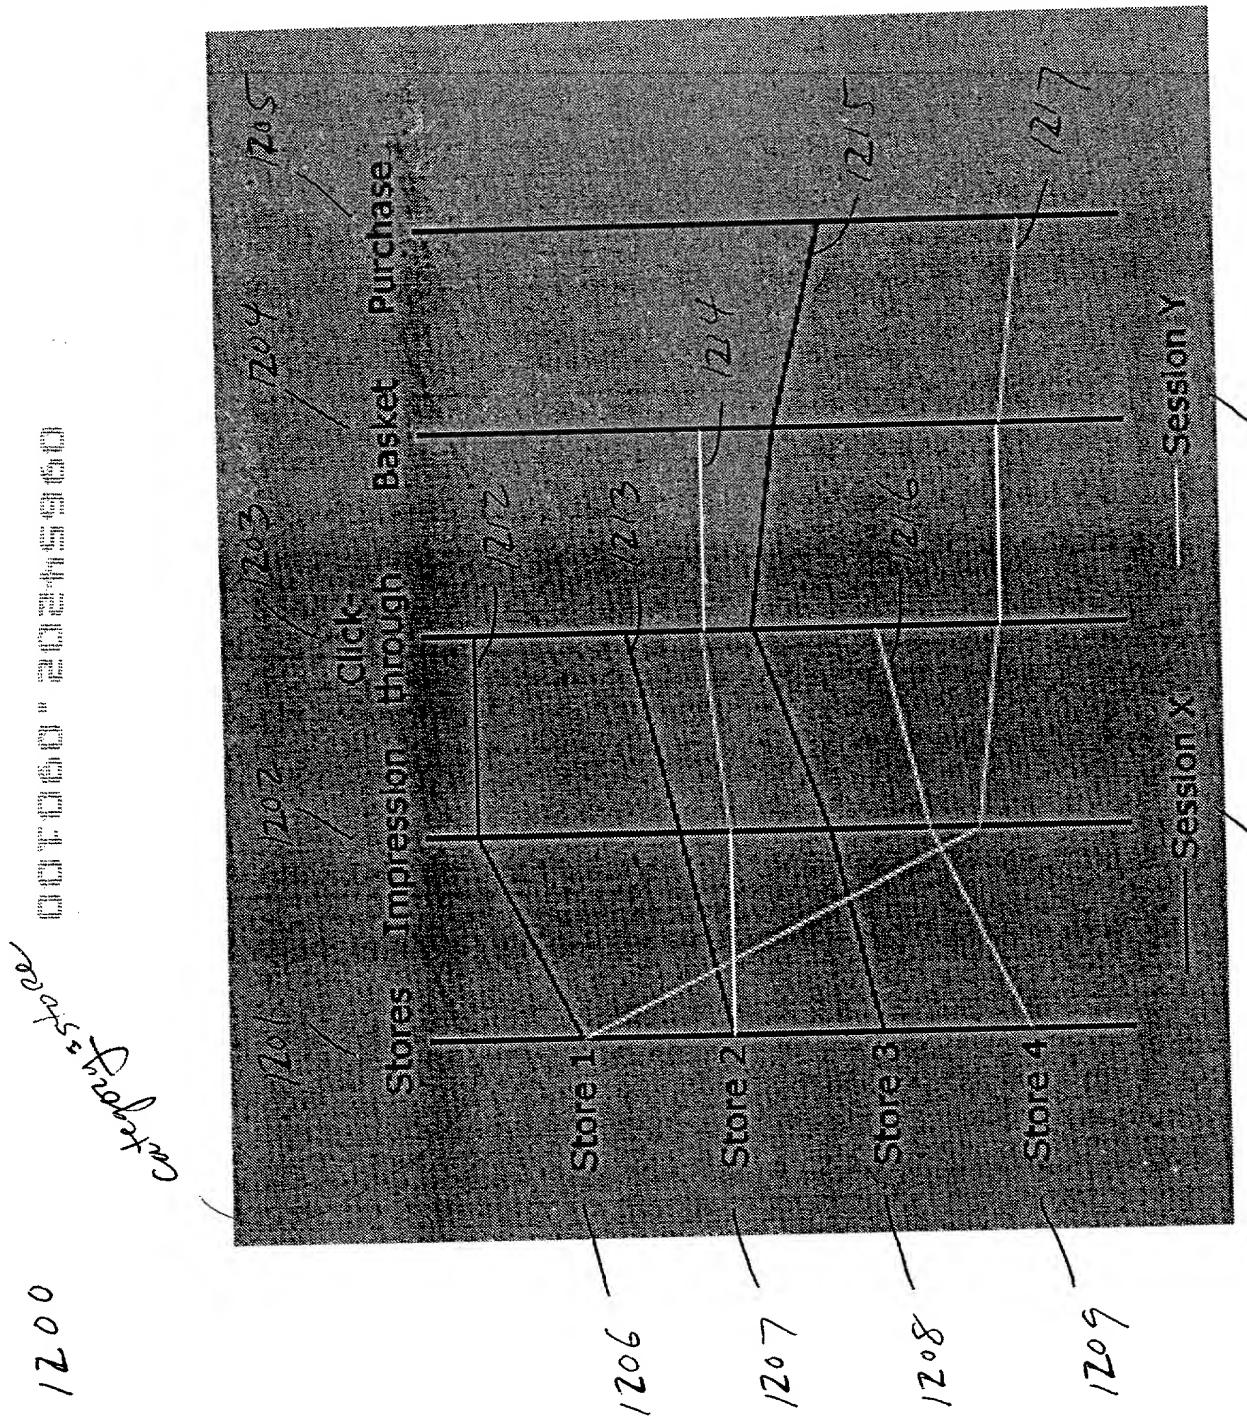

**Figure 12:** An example of visualizing shopping activities in more than one online stores

*by category of session - set of events*

**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**SYSTEM AND METHOD FOR VISUALLY ANALYZING CLICKSTREAM DATA WITH A PARALLEL COORDINATE SYSTEM**

the specification of which (check one)

is attached hereto.

\_\_\_\_ was filed on \_\_\_\_\_ as United States Application Number

or PCT International Application Number \_\_\_\_\_

and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application, having a filing date before that of the application on which priority is claimed:

Priority Foreign Application(s)			Priority Claimed
<input checked="" type="checkbox"/>	(Number)	(Country)	(Day/Month/Year Filed) <input type="checkbox"/> Yes <input type="checkbox"/> No
<input checked="" type="checkbox"/>	(Number)	(Country)	(Day/Month/Year Filed) <input type="checkbox"/> Yes <input type="checkbox"/> No
<input checked="" type="checkbox"/>	(Number)	(Country)	(Day/Month/Year Filed) <input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

<input checked="" type="checkbox"/>	(Application Number)	(Filing Date)
<input checked="" type="checkbox"/>	(Application Number)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. §120 of any United States Application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States, or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

Manny W. Schecter (Reg. 31,722), Lauren Bruzzone (35,082), Christopher A. Hughes (Reg. 26,914), Edward A. Pennington (Reg. 32,588), John E. Hoel (Reg. 26,279), Joseph C. Redmond, Jr. (Reg. 18,753), Douglas W. Cameron (Reg. 31,596), Louis P. Herzberg (Reg. 41,500), Stephen C. Kaufman (Reg. 29,551), Daniel P. Morris (Reg. 32,053), Louis J. Percello (Reg. 33,206), David M. Shofri (Reg. 39,835), Robert M. Trepp (Reg. 25,933), Paul J. Otterstedt (Reg. 37,411), Wayne L. Ellenbogen (43,602) and Marian Underweiser (Reg. 46,134)

Send Correspondence to: Louis J. Percello, Intellectual Property Law Dept.

IBM Corporation, P.O. Box 218, Yorktown Heights, New York 10598

Direct Telephone Calls to: (name and telephone number) Louis J. Percello (914)945-3145

Thomas Anthony Cofino

Full name of sole or first inventor

Inventor's Signature

Date

19 Jean Street, Rye, New York 10580  
Residence

USA  
Citizenship

same as above  
Post Office Address

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATIONStephen H. GomoryFull name of second joint-inventor, if any

Inventor's signature

Date

68 Leroy Avenue, Tarrytown, New York 10591

Residence

USA

Citizenship

same as above

Post Office Address

Juhnyoung LeeFull name of third joint-inventor, if any

Inventor's signature

Date

211 Treetop Lane, Yorktown Heights, New York 10598

Residence

Republic of Korea

Citizenship

same as above

Post Office Address

Mark Edward PodlaseckFull name of fourth joint-inventor, if any

Inventor's Signature

Date

80 Valley Road, New Preston, Connecticut 06777

Residence

USA

Citizenship

same as above

Post Office Address

Full name of fifth joint inventor, if any

Inventor's Signature

Date

Residence

Citizenship

Post Office Address

Full name of sixth joint-inventor, if any

Inventor's signature

Date

Residence

Citizenship

Post Office Address